



P 2


100 % Para-Aramid continuous Fiber with PTFE-Blocking Agent and Silicone Run In Lubricant

Characteristics

- Excellent in highly abrasive products
- Wear resistant universal packing
- Minimized monitoring, short run-in period
- Shafts or shaft sleeves in HRC 60 recommended



Operating range

			
p [bar]	25	500	250
v [m/s]	25	2	
t °C	-50 ... +280		
pH	2 - 12		
g/cm ³	1.25		

Practical useful application data:


max. temperature: +200 °C
max. pressure centrifugal pumps: 20 bar

Main application

- Centrifugal pumps
- Mixer
- Kneader
- Agitators
- Autoclave
- Refiner

Suitable for

- All industries
- Chemical industry
- Waste water technology
- Pulp and paper industry

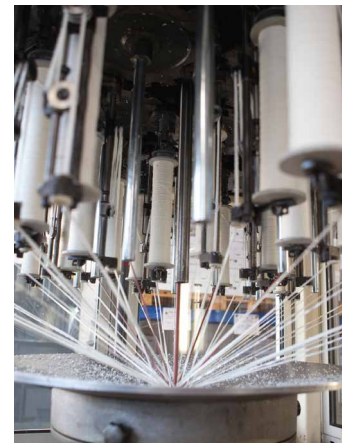

Form of delivery

This packing can be manufactured from 4 to 40 mm square as well as in intermediate, inch sizes and special measurements.

- 04 - 09 mm on 1 kg spool
- 10 - 15 mm on 2,5 kg spool
- 16 - 25 mm on 5 kg spool

Special length, pre-cut or die formed rings on request.

1 kg of packing of the following cross-sections is equivalent to displayed meter lengths:

Size mm	Meter	Size mm	Meter
4	50.0	13 [1/2"]	5.0
5 [3/16"]	32.0	14 [9/16"]	4.1
6	22.2	15	3.6
6.4 [1/4"]	19.8	16 [5/8"]	3.1
8 [5/16"]	12.5	18	2.5
9.5 [3/8"]	8.9	19 [3/4"]	2.2
10	8.0	20	2.0
11 [7/16"]	6.5	22 [7/8"]	1.7
12	5.6	25 [1"]	1.3

All technical information and advice is based on our experience and will be given most conscientiously but without any liability.

Indication and figures are for guidance only and need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.

Please note that the technical values cannot be used all at the same time in their maximum values.