






### S6 SI SKS Blue

PTFE fibre with Special PTFE Dispersion and FDA conform Run In lubricant impregnated and Silicon Tube Core in food grade quality.

#### Characteristics

- Elevated heat conductivity
- High chemical resistance and for clean media

#### Operating range

			
p [psi]	290	-	-
v [fpm]	1970	-	-
t °F	-150 ... +540		
pH	1 - 14		
lb/in <sup>3</sup>	0.0614		

Practical useful application data:  
due to Elastomeric core max.  
temperature +320 °F

#### Main application


- Mixer
- Agitators
- Autoclave
- Kneader
- Paddle dryer

#### Suitable for

- For applications with radial shaft run-out or stuffing boxes with non centric positioned shafts.
- Products in the food processing industry

#### Suitable for

- EC 1935:2004 in accordance to EU 10/2011
- FDA conformity

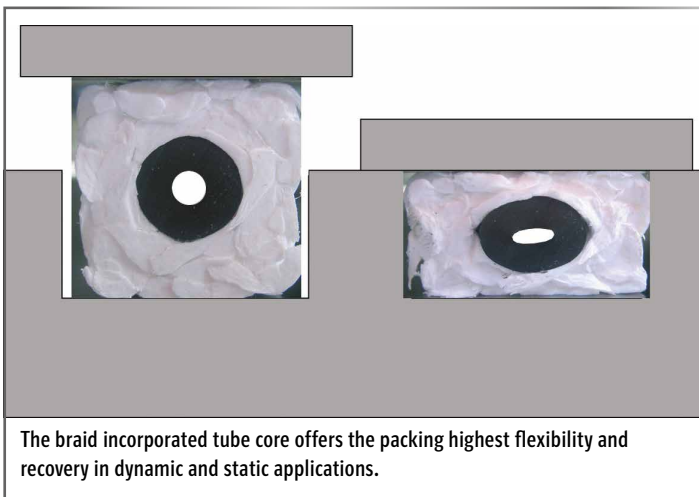

The braid incorporated tube core offers the packing highest flexibility and recovery in dynamic and static applications.

#### Form of delivery

This packing can be manufactured from 14 to 40 mm / 9/16" to 1.5" square as well as in intermediate, inch sizes and special measurements.

Full elastomer core packing is made from 8 mm / 5/16" crosssection and above.

14 mm / 9/16" and above on 10 lbs spool

Special length, pre-cut or die formed rings on request.

1 lbs of packing of the following cross-sections is equivalent to displayed lengths in feet:

Size	Feet	Size	Feet
14 [9/16"]	4.5	19 [3/4"]	2.4
15	3.9	20	2.2
16 [5/8"]	3.4	22 [7/8"]	1.8
18	2.7	25 [1"]	1.4

All technical information and advice is based on our experience and will be given most conscientiously but without any liability.

Indication and figures are for guidance only and need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.

Please note that the technical values cannot be used all at the same time in their maximum values.

#### ProPack AG

Rudolf-Diesel-Ring 28 . 82054 Sauerlach . Germany

Phone ++49 (0) 8104 6640 0 . Fax ++49 (0) 8104 6640 44

propack@propack.ag

**www.propack.ag**  
TECHNOLOGY MADE IN GERMANY