



S 12K Nylon

Combination Braid of ePTFE/Graphite and Para-Aramid Fiber Corner Reinforcement with Silicone Run In Lubricant and braided Nylon Core.

Characteristics

- Good heat conductivity
- Suitable for abrasive products

A high strength Nylon Core allows to attach a weight on the packing in order to prestretch and locate it on the washer drum.

Operating range

			
p [bar]	0	0	0
v [m/s]	15	0	
t °C	-100 ... +280		
pH	2 - 12		
g/cm ³	1.4		

Main application


- Pulp Washer Drums
- In units with larger gap widths, or in solids containing media.

Suitable for

- Pulp and paper industry

Variant

P 3K

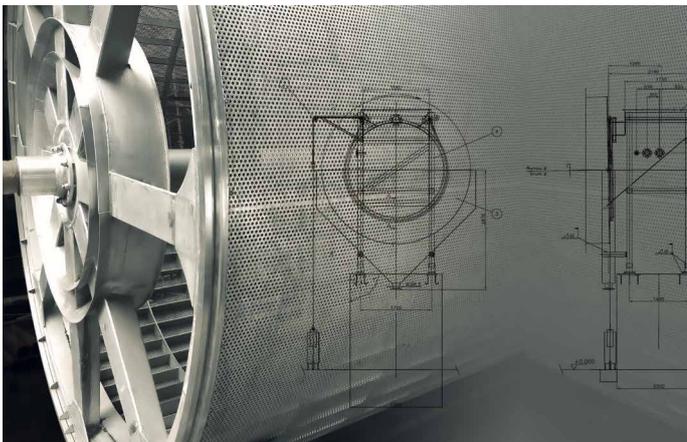

Form of delivery

This packing is typically manufactured in dimensions 25 mm [1"], 32 mm [1¼"].

Other dimensions on request.

1 kg of packing of the following cross-sections is equivalent to displayed meter lengths:

Size mm	Meter
25 [1"]	1.1
32 [1¼"]	0.8

All technical information and advice is based on our experience and will be given most conscientiously but without any liability.

Indication and figures are for guidance only and need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.

Please note that the technical values cannot be used all at the same time in their maximum values.

ProPack AG

Rudolf-Diesel-Ring 28 · 82054 Sauerlach

Fon ++49 (0) 8104 6640 0 · Fax ++49 (0) 8104 6640 44

propack@propack.ag

www.propack.ag

TECHNOLOGY MADE IN GERMANY